EXPLANATION OF TYPICAL SLOPE STAKE MARKINGS

68
RP
+ 0 5
@
9 1
TO SS
C 8 5
@
35 3
CS=4:1
TO GUT
F 0 5
@
1 6
TO
S.G. SHO
0+50 LT.

- DISTANCE TO DESIGN C/L
- INDICATES THIS IS A REFERENCE POINT
- UP FROM "RP" TO SLOPE STAKE (SS)
- DISTANCE IN FROM "RP" TO SLOPE STAKE (SS)
- TO SLOPE STAKE (TOP OF CUT)
- CUT FROM "SS" TO GUTTER
- DISTANCE IN FROM "SS" GUTTER
- CUT SLOPE RATIO
- TO F/L GUTTER
- FILL FROM GUTTER TO FINISH GRADE SHOULDER
- DISTANCE IN FROM GUTTER TO FINISH GRADE SHOULDER
- TO FINISH GRADE SHOULDER
- STATION (50' FROM BEGINNING OF ROAD)
- RIGHT OF DESIGN CENTERLINE

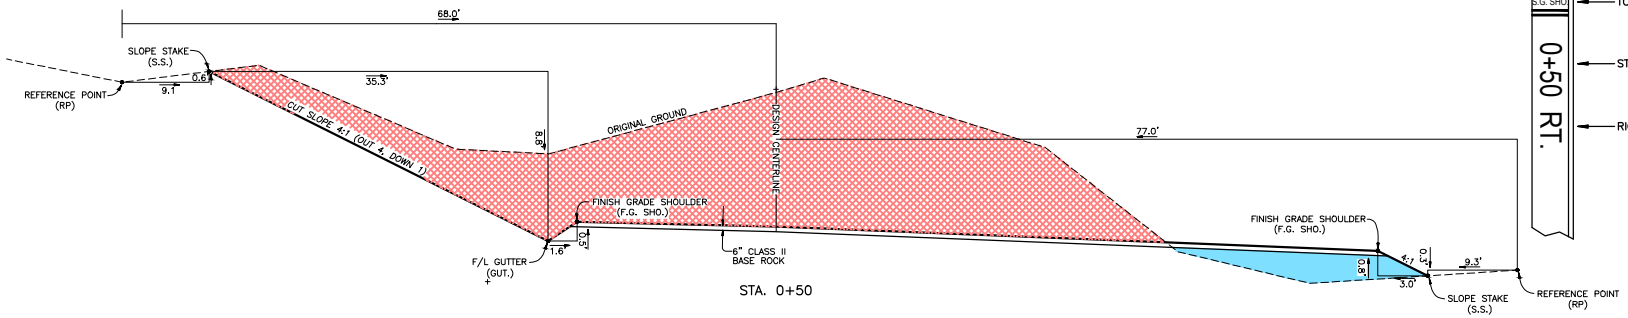

77
RP
- 0 3
@
9 3
TO SS
F 0 8
@
3 0
FS=4:1
TO
S.G. SHO
0+50 RT.

- DISTANCE TO DESIGN C/L
- INDICATES THIS IS A REFERENCE POINT
- DOWN FROM "RP" TO SLOPE STAKE (SS)
- DISTANCE IN FROM "RP" TO SLOPE STAKE (SS)
- TO SLOPE STAKE (TOE OF FILL)
- FILL FROM "SS" TO FINISH GRADE SHOULDER (F.G. SHO.)
- DISTANCE IN FROM "SS" TO FINISH GRADE SHOULDER
- FILL SLOPE RATIO
- TO FINISH GRADE SHOULDER
- STATION (50' FROM BEGINNING OF ROAD)
- RIGHT OF DESIGN CENTERLINE