

1 Northeast Corner

Set 1" x 3" I.P. for corner in agreement with GLO calls.
 Calls to South
 Running North between Sec 35 & 36
 78.00 Pudding Crk 20 lks wide runs S 20° W
 80.00 Right bank Pudding 20 lks wide ... and corner.
 Calls to East
 Running East from corner, between Sec 25 & 36
 .30 Pudding Cr. 20 lks. wide runs S 20° W
 3.00 Begin ascent and run on side of hills
 falling toward Pudding Cr.
 The GLO BT described as "Rwd 12" diam bears
 S 25° W 44 lks." comes at edge of old Rwd. stub
 that is now down, partly in creek.
BTs this survey
 L.S. 3117 tag in 16" Rwd. scribed "BT SC" brs. N16° 36' W 11.8 ft.
 L.S. 3117 tag in 14" Rwd. scribed "BT SC" brs. S45° 48' W 27.0 ft.
 L.S. 3117 tag in 20" Rwd. scribed "BT S35" brs. S67° 39' W 48.43 ft.

2 North 1/4 Corner

Did not find nor set this corner.

3 Northwest Corner

Set 1" x 5" I.P. for corner from GLO calls North, South,
 and East
 Calls to North
 00.00 Descend steep hills, sloping NE
 8.00 Little Valley Trail bears NE & SW
 Calls to South
 Running North between Sections 34 & 35
 73.00 Top of ridge 50 ft high, runs SE.
 75.50 Bottom of gulch 50 ft deep, runs SE.
 77.00 Top of ridge 40 ft high
 80.00 Mark oak 10" diam. for Corner to Sections 26, 27, 34, 35
 Oak 7" dia. bears S 30° E 43 lks.
 Oak 7" dia. bears S 89° W 17 lks.
 Oak 7" dia. bears N 63° W 44 lks.
 Oak 7" dia. bears N 9° E 20 lks.
 Calls to East
 17.50 Bottom of gulch 50 ft deep & stream 1 lk. wide runs SE.
 24.50 Little Valley Crk. 6 lks. wide Runs SE. Ascend steep ridge.
 The above calls agree with the exception of the call immedi-
 ately south of Section Corner. I therefor disregard this
 distance call, assuming it should have been 79.00 in lieu of
 77.00, thus making the other calls fit.
BTs this survey
 LS 3117 tag on 20" Rwd scribed "BT S 27" N 69° 02' W 4.5 ft.
 LS 3117 tag on 16" Rwd scribed "BT S 26" N 67° 43' E 18.0 ft.
 LS 3117 tag on 20" Rwd scribed "BT S 35" S 73° 37' E 29.4 ft.

4. West 1/4 Corner

Set 1" x 4" I.P. for corner from GLO calls
 on Section Line, as follows:
 Running North between 34 & 35
 40.00 Mark Hemlock 7" diam for 1/4 Sec. Cor.
 43.00 Bottom of gulch 200 ft deep & stream
 1 lk. wide runs NE.
 45.50 Top of small ridge
 47.50 Bottom of gulch 90 ft deep. Runs SE.
 These calls give a location on this corner
 for latitude as well as departure. Location
 falls at the top of a 200 ft slide
BTs this survey
 LS 3117 tag in 2 ft. dia. Rwd. scribed "BT 1/4"
 N 74° 56' E 29.9 ft.
 LS 3117 tag in 20" dia. Douglasfir scribed
 "BT 1/4" S 46° 16' E 13.1 ft

5 Northwest 1/8 Corner

Corner falls in 12" dia. Douglasfir tree
 which I scribe "NW 1/8"
BTs this survey
 LS 3117 tag in 15" Rwd scribed "BT 1/16"
 N 45° 10' W 49.7 ft.
 Continued above right

5 Continued

LS 3117 tag in 20" Rwd double scribed "BT 1/16"
 S 40° 10' W 33.0 ft.
 LS 3117 tag in 16" Rwd scribed "BT 1/16" N 41° 06' E 21.0 ft.

6 N 1/4 C - C

Set 5/8" x 12" bolt in private road for 1/16 corner.
BTs this survey
 LS 3117 tag in 2" Rwd scribed "BT 1/16" N 43° 21' W 32.00 ft.
 LS 3117 tag in 2 1/2" Rwd scribed "BT N 1/2 C - C" N 87° 59' E 28.45 ft.

7 N 1/8 E

Set 1" x 5" I.P. for corner.
BTs this survey
 LS 3117 tag in 15" Rwd scribed "BT 1/16" S 73° 10' E 15.75 ft.
 LS 3117 tag in 18" Rwd scribed "BT 1/16" S 30° 57' E 20.45 ft.

8 East 1/4 Corner


Did not find nor set this corner.

9 South 1/4 Corner

Found 3" pipe and scribed post marking this corner,
 which has long been accepted, and is set in locus of
 remains of trees that were possibly GLO BTs. The top-
 ography agrees with the calls.
BTs this survey
 LS 3117 tag in 16" Rwd scribed "BT 1/4" S 39° 57' W 26.7 ft.
 4" Dia. Rwd stump S 44° 02' E 22.6 ft. Possible remains of
 2" Dia Rwd sprout N 11° 24' W 9.7 ft. GLO BTs.

10 Southeast Corner

Set 1" x 4" I.P. for cor. by retracing Twp. line. The topography
 fits the calls and there are hacks that may be GLO.
 The GLO BT described as Rwd 5" dia. S 65° E 20 lks comes at
 edge of old suppressed Rwd sprouts off old stub.
BTs this survey
 LS 3117 tag in 3" Rwd stump scr. "BT SC" S 60° 12' E 13.75 ft.
 LS 3117 tag in 18" Douglasfir scr. "BT S 35" N 28° 32' W 27.95 ft.
 LS 3117 tag in 18" Rwd scr. "BT SC" N 61° 42' W 35.6 ft.

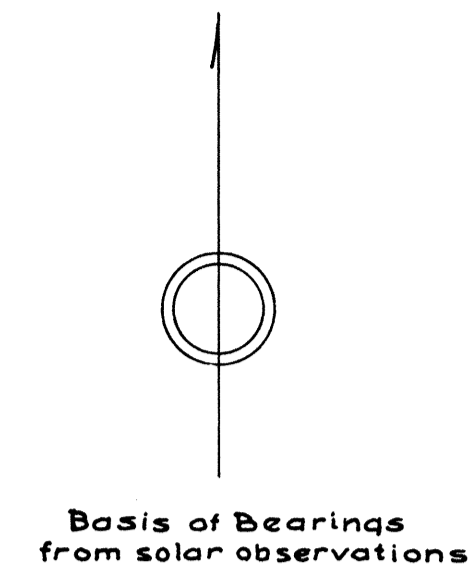

RECORD OF SURVEY
SECTION 35
T19N R17W MDM

Scale 1" = 500'

This map correctly represents a survey made by me in conform-
 ance with the requirements of Chapter 15 of Division 3 of the
 Business and Professions Code in October and November 1962.

George Rau L.S. 3117

This map has been examined for conformance with the requir-
 ements of Chapter 15 of Division 3 of the Business and Profess-
 ions Code this 27th day of Dec. 1962.

J.K. Richardson
 Mendocino County Surveyor

Filed for record at the request of Aborigine Lumber Company by *Geo Rau*
 in Map Case 2 Drawer 2 Page 27 Mendocino County
 Records this 27th day of December 1962 at 12:01 P.M.

Alta Ballow
 Mendocino County Recorder
 by *V. Richardson*, Asst. Recorder

41939

Fee: \$5.00

CASE	2
DRAWER	2
PAGE	27